



- 110 Pastry trolleys
- 111 Bakery trolleys - Baking and cake trays
- 112 Bakery trolleys for vats
- 112 Folding wall rack
- 113 Gastronorm racks for GN trays
- 114 Racks to slide under a table
- 114 Protective cover for Gastronorm racks; GN cooking trays
- 115 Reinforced Built-in GN trolleys
- 115 Built-in trolley for gastronorm trays
- 116 Multi-use serving trolleys
- 116 Chef trolley
- 117 Cafeteria trolleys
- 117 Desks
- 118 Platform trolley
- 119 Tray and rack holder trolleys
- 119 Mobile container
- 120 Drainage and warehousing trolley
- 121 Proofer trolley
- 122 Constant level trolleys
- 123 Plate trolley

## RACKS | TROLLEYS



**SCAN ME** and download all the technical datasheets of the range!

## Pastry trolleys for 400 x 600 trays, 400 mm opening

- Frame: AISI 304L 25 x 25 mm stainless steel curved tubular frame
- 4 swivel castors: Ø 125 mm (2 with brake), zinc or polyamide coating shell, with rubber bumpers
- Dimensions with rubber bumpers : +70 mm
- Runners in AISI 304L stainless steel 1.5 mm thickness (no front and rear stops)



Castors with brake. Bumpers.  
**Castors with a polyamide covering:** large diameter (125 mm) for better mobility of your trolley. Ideally suited to damp environments and for hygiene standards. No corrosion with the time.



RP4609



RP4620



RP4620B


### WITHOUT STOP BAR - ENTRY 400

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
9 levels*	75	468 x 615 x 915	14	<b>RP4609</b>	<b>RP4609P</b>
15 levels	102	465 x 612 x 1775	17	<b>RP4615</b>	<b>RP4615P</b>
20 levels	75	465 x 612 x 1775	20	<b>RP4620</b>	<b>RP4620P</b>

\* With work top

Shipping within 48h

OPTION	Ref.
Extra cost for 1 collapsible stop bar (please notify the quantity)	<b>RPBA</b>

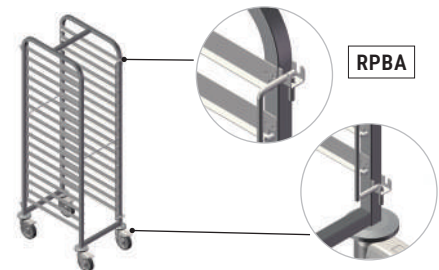

### WITH STOP BAR - ENTRY 400

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
15 levels	102	465 x 612 x 1775	17	<b>RP4615B</b>	<b>RP4615PB</b>
20 levels	75	465 x 612 x 1775	20	<b>RP4620B</b>	<b>RP4620PB</b>

Shipping within 48h

#### OPTION


4 stainless steel castors\* (2 with brake) - Replace the P by X to the end of the reference

\* In addition to the price of trolleys with polyamide castors

## Pastry trolleys for 600 x 400 mm trays, 600 mm opening



RP6420

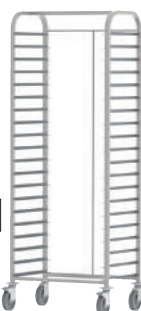

RP6420B


### WITHOUT STOP BAR - ENTRY 600

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
15 levels	102	662 x 412 x 1775	15	<b>RP6415</b>	<b>RP6415P</b>
20 levels	75	662 x 412 x 1775	18	<b>RP6420</b>	<b>RP6420P</b>

### WITH STOP BAR - ENTRY 600

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
15 levels	102	662 x 412 x 1775	15.5	<b>RP6415B</b>	<b>RP6415PB</b>
20 levels	75	662 x 412 x 1775	18.5	<b>RP6420B</b>	<b>RP6420PB</b>

## Bakery trolleys for 400 x 800 mm trays or mesh, 400 mm opening

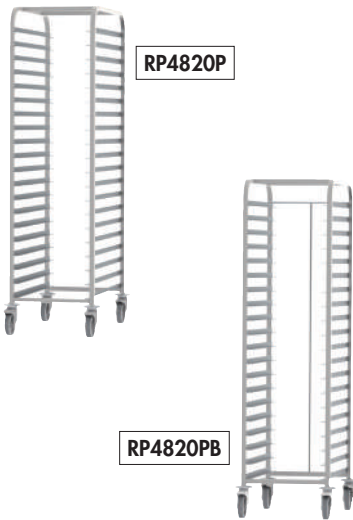


### WITHOUT STOP BAR - ENTRY 400

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
20 levels	75	465 x 812 x 1775	24	<b>RP4820</b>	<b>RP4820P</b>

### WITH STOP BAR - ENTRY 400

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
20 levels	75	465 x 812 x 1775	24.5	<b>RP4820B</b>	<b>RP4820PB</b>

## Bakery trolleys for 600 x 800mm trays or mesh, 600 mm opening

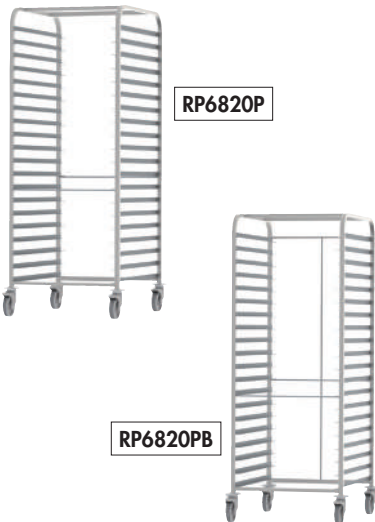

### WITHOUT STOP BAR - ENTRY 600

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
20 levels	75	662 x 812 x 1775	29.4	<b>RP6820</b>	<b>RP6820P</b>

### WITH STOP BAR - ENTRY 600

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	ZINC SHELL Ref.	POLYAMIDE SHELL Ref.
20 levels	75	662 x 812 x 1775	29.4	<b>RP6820B</b>	<b>RP6820PB</b>


## Baking and cake trays

### Pastry trays



Designation	I x D mm	Ref.
Sheet aluminium cake tray	400 x 600	<b>P64A</b>

### Stainless steel grids

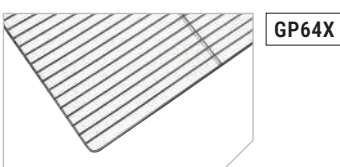

Designation	I x L mm	Ref.
Stainless steel grids	600 x 400	<b>GP64X</b>
	600 x 800	<b>GP68X</b>

Shipping within 48h

## Bakery trolleys for vats



- Frame: AISI 304L 25 x 25 mm stainless steel curved tubular frame
- 4 swivel castors: Ø 125 mm (2 with brake), polyamide coating shell
- Runners: 20 x 3 mm flat stainless steel assembled with weld beads for high resistance - Space between runners: 180 mm

Designation	L x D x H mm	Kg	Ref.
8 levels	(604/323) x 394 x 1820	11	<b>RPB8</b>
16 levels (2x8)	590 x 750 x 1820	21	<b>RPB16</b>

Shipping within 48h

## Complements for bakery trolleys for vats



**RPBBAC2**




**RPBBAC2C**



**RPBBAC1**



**RPBBAC1C**

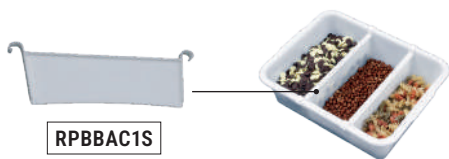

**RPBBAC1S**

### Round plastic vat - Lid

Designation	Dimensions mm	Ref.
Round plastic vat	Ø 480 - Height 160	<b>RPBBAC2</b>
Lid for round plastic vat		<b>RPBBAC2C</b>

### Rectangular plastic vat - Lid - Separator

Designation	L x D x H mm	Ref.
Rectangular plastic vat	530 x 410 x 140 20 l.	<b>RPBBAC1</b>
Lid for rectangular plastic vat		<b>RPBBAC1C</b>
Separator for rectangular plastic vat		<b>RPBBAC1S</b>

## Folding wall rack

- All stainless steel AISI 304L
- 8 levels
- To be fixed on wall
- With safety feature locking the rack in open position



All sizes of trays can be placed depending on the spacing



Designation	H x W mm	Kg	Ref.
Folding wall rack	700 x 400	4	<b>RPMR8</b>

Shipping within 48h

## Gastronorm racks for GN1/1 trays

- Frame: AISI 304L 25 x 25mm stainless steel curved tubular frame
- 4 swivel castors: Ø 125 mm (2 with brake), polyamide coating shell, with rubber bumpers
- Dimensions with rubber bumpers : +70 mm
- Runners: AISI 304L stainless steel 1.5 mm thickness with S-shaped front and rear stops



**+** **Castors with a polyamide covering:** large diameter (125 mm) for better mobility of your trolley. Ideally suited to damp environments and for hygiene standards. No corrosion with the time. Rear stops on runners - Bumpers



### WITHOUT STOP BAR

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
8 levels* GN1/1	77	385 x 563 x 900	11	<b>RPS08G1P</b>
17 levels GN1/1	77	382 x 560 x 1641	17	<b>RPS17G1P</b>
20 levels GN1/1	77	382 x 560 x 1795	22	<b>RPS20G1P</b>

\* With work top

Shipping within 48h

### WITH STOP BAR

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
17 levels GN1/1	77	382 x 560 x 1641	17	<b>RPS17G1PB</b>
20 levels GN1/1	77	382 x 560 x 1795	22	<b>RPS20G1PB</b>

Shipping within 48h

## Gastronorm racks for GN2/1 trays



### WITHOUT STOP BAR

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
8 levels* GN2/1	77	590 x 683 x 900	11	<b>RPS08G2P</b>
17 levels GN2/1	77	587 x 680 x 1641	17	<b>RPS17G2P</b>
20 levels GN2/1	77	587 x 680 x 1795	22	<b>RPS20G2P</b>

\* With work top

Shipping within 48h


### WITH STOP BAR

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
17 niveaux GN2/1	77	587 x 680 x 1641	17	<b>RPS17G2PB</b>
20 niveaux GN2/1	77	587 x 680 x 1795	22	<b>RPS20G2PB</b>

Shipping within 48h

**i** Gastronorm tray sizes page 114

OPTION	Ref.
4 stainless steel castors (2 with brake) - Replace the P by X to the end of the ref.	
Extra cost for 1 collapsible stop bar (please notify the quantity)	<b>RPBA</b>

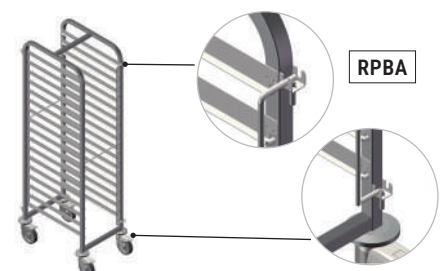

## Racks to slide under a table

- With stainless steel work top
- 6 pairs of slides

**+** Space saving

**TAD716**  
(see page 38)



**RPS06G1P**



**RPS06G2P**

### FOR GN1/1 TRAYS

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
6 levels GN1/1	77	385 x 563 x 746	11	<b>RPS06G1P</b>

### FOR GN2/1 TRAYS

Designation	L I mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
6 levels GN2/1	77	590 x 683 x 746	12.5	<b>RPS06G2P</b>

Shipping within 48h

**i**

### GASTRONORM TRAY SIZES :

- ▶ GN1/1 : 530 x 325 mm
- ▶ GN2/3 : 354 x 325 mm
- ▶ GN1/2 : 325 x 265 mm
- ▶ GN1/3 : 325 x 176 mm
- ▶ GN1/4 : 265 x 162 mm
- ▶ GN1/6 : 176 x 162 mm
- ▶ GN1/9 : 108 x 176 mm
- ▶ GN2/4 : 162 x 530 mm



**RPG1HOU**

## Protective cover for Gastronorm racks


- Transparent washable cover
- Zipper closure

Designation	L x W x H mm	Ref.
For GN1/1 rack	600 x 410 x 1640	<b>RPG1HOU</b>
For GN2/1 rack	720 x 610 x 1640	<b>RPG2HOU</b>

## GN cooking trays

Designation	l x L mm	Ref.
Stainless steel grid - GN1/1	325 x 530	<b>GG11X</b>
Stainless steel grid - GN2/1	530 x 650	<b>GG21X</b>

Shipping within 48h

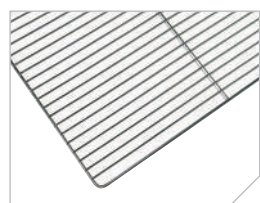

## Reinforced Built-in GN trolleys for GN food trays

- GN 1/1 and GN 2/1 models
- In 304L stainless steel
- Structure in welded 25x25 tube with Z profile for installation
- Models reinforced with a third Z central profile

- Runners: AISI 304L stainless steel 1.5mm thickness with front and rearstops, assembled with weld beads for high resistance

**+** **Special for heavy loads.** Up to 240 kg by trolley with a maximum of 30 kg per level.



### GN1/1 MODEL

Designation	L x W x H mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
19 levels GN1/1	77	386 x 552 x 1797	25	<b>RPER19G1P</b>

Shipping within 48h

### GN2/1 MODEL

Designation	L x W x H mm	L x W x H mm (without bumper stop)	Kg	POLYAMID WHEELS Ref.
19 levels GN2/1	77	588 x 672 x 1797	28.5	<b>RPER19G2P</b>

Shipping within 48h

### OPTION

4 stainless steel castors (2 with brake) - Replace the P by X to the end of the reference

**+**

- **Castors with a polyamide covering:** large diameter (125 mm) for better mobility of your trolley - With brake
- Ideally suited to damp environments and for hygiene standards - No corrosion with the time
- Stops on the corner pieces - Weld beads = high resistance

## Built-in trolley for gastronorm trays

- Frame: 25 x 25 mm AISI 304L stainless steel
- 4 castors: 2 with brake, polyamide coating
- Capacity: 2 GN1/1 bowls or 1 GN2/1 bowl (depth: 200 mm max.) - supplied without bowl
- Maximum load : 100 kg



Designation	L x W x H mm	Kg	Ref.
Built-in trolley	555 x 705 x 860	8	<b>CVE21P</b>

Shipping within 48h

## Multi-use serving trolleys



CS583M

- Frame: Ø 25 mm curved stainless steel
- 4 swivel castors: Ø 125 mm (2 with brake) zinc or polyamid coated with plastic bumpers
- Pressed trays with rounded corners
- Maximum load per tray: 80 kg
- Trolley flat-packed delivered

### Trays 800 x 500 mm

Dimensions : 820 x 520 x H 940 mm

Designation	L x D x H mm	Kg per unit	POLYAMID SHELL Ref.
With 2 trays - 1 pallet x 24 pieces	1800 x 800 x 2000	12	CS582D
With 3 trays - 1 pallet x 20 pieces	1800 x 800 x 2000	15	CS583D

Shipping within 48h



CS6102M

### Trays 1000 x 600 mm

Dimensions : 1020 x 620 x H 940 mm

Designation	L x D x H mm	Kg per unit	POLYAMID SHELL Ref.
With 2 trays - 1 pallet x 19 pieces	1800 x 800 x 2000	14	CS6102D
With 3 trays - 1 pallet x 15 pieces	1800 x 800 x 2000	20	CS6103D

Shipping within 48h



CSPP

## Accessories


Designation	Kg	Ref.
4 stainless steel castors (2 with brake) for CS		RX-ECH/CS
Dustbin bag holder	2	CSPP
GN1/3 cutlery tray	1	CSPC
Washable cover with zipper	For CS582 / CS583 models	CS58HOU
	For CS6102 / CS6103 models	CS61HOU



CSPC



CS58HOU



## Chef trolley

- Welded tubular 25x25 mm AISI304L stainless steel frame
- White polyethylen work top 25 mm thick
- On swivel castors: Ø 125 mm (with 2 brakes), polyamide coating shell, with rubber bumpers
- Equipped with a removable holder for 6 gastronorm racks GN1/6 (not included)
- Rack with 7 levels separated by 80 mm for GN2/1
- A removable box on the side to place knives and a rod for accessories are also included in this item

Designation	L x W x H mm	Kg	Ref.
Chariot du chef	590 x 675 x 900/1750	12	TPG01RP




TPG01RP

Reversible

## Cafeteria trolleys

- Colour of the 2 side panels: white RAL9016
- Strong and easy handling: 20 micron anodised aluminium uprights, side panels in thermoplastic
- 4 galvanized castors, 4 protective bumpers (in synthetic rubber)
- Max. load 120kg
- Delivered in kit form

RP12EN2

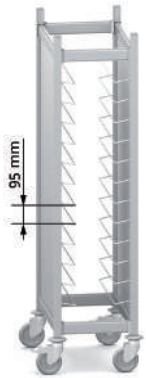

### 12 trays : 12 levels - 1 tray per level

- 1 EURONORM tray (530 x 370 mm) per level
- Distance between levels: 95 mm
- Compatible with other trays: Tray entry dimension 340 mm to 370 mm max. - Max. tray length 530 mm
- Tray entry way :




Designation	L x W x H mm	Kg	Ref.
12 trays trolley - 1 tray per level	505 x 680 x 1680*	29	<b>RP12EN1</b>

\*Overall dimensions - Protective buffers included



RP12KIT

Designation	Ref.
Kit adaptation trays trolleys EN or GN for RP12EN1	<b>RP12KIT</b>

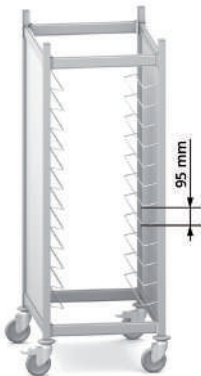

### 24 trays : 12 levels - 2 trays per level

- 2 EURONORM trays (530 mm x 370 mm) per level (i.e. 24 trays in total)
- Distance between levels: 95 mm
- Compatible with other trays: Tray entry dimension 500 mm to 530 mm max. - Cumulative tray length: 740 mm
- Tray entry way :



Designation	L x W x H mm	Kg	Ref.
24 trays trolley - 2 trays per level	665 x 910 x 1680*	32	<b>RP12EN2</b>

\*Overall dimensions - Protective buffers included

## Desks

- AISI304L stainless steel
- Lid : with lock - 10° slope with rim to hold documents on the desk

PU01



### Wall mounted

L x W x H mm	Kg	Ref.
520 x 520 x 165	7	<b>PU01</b>



PU01PR



### On trolley

- Desk with frame and trolley in square tubular stainless steel 25 x 25 mm on 4 castors, 2 with brake
- Bottom shelf 245 mm from the floor

L x W x H mm	Kg	Ref.
520 x 520 x 1150	13	<b>PU01PR</b>

Shipping within 48h

OPTION	Ref.
Drawer with lock for PU01PR (fixed on the trolley)	<b>PTR01</b>

OPTION	Ref.
4 stainless steel castors (2 with brake) Add X to the end of the reference	<b>.../X</b>

PU01PR + PTR01



## Platform trolley

- Frame 25x25 mm welded stainless steel
- 4 castors: Ø 125 mm, 2 with brakes, zinc coated
- Maximum load : 250 kg



**Ergonomics:** Higher handle = less effort required.  
Practical for handling heavy bulky loads.

## Platform trolley with deck in welded tubes



CPF1206

Designation	L x W x H mm	Kg	Ref.
Platform trolley with deck in welded tubes	1200 x 600 x 950	14	<b>CPF1206</b>

 Shipping within 48h

OPTION	Ref.
4 stainless steel castors (2 with brake) - Add X to the end of the reference	.../X

## Platform trolley with full stainless steel deck



CPF1206P

Designation	L x W x H mm	Kg	Ref.
Platform trolley with full stainless steel deck	1200 x 600 x 950	20	<b>CPF1206P</b>

 Shipping within 48h

OPTION	Ref.
4 stainless steel castors (2 with brake) - Add X to the end of the reference	.../X

## Platform trolley with full stainless steel deck and 4 integrated angle bumpers

- 2 integrated angle rubber bumpers



CPF1206C

Designation	L x W x H mm	Kg	Ref.
Platform trolley with full stainless steel deck and 2 integrated angle bumpers	1200 x 600 x 950	20	<b>CPF1206C</b>

OPTION	Ref.
4 stainless steel castors (2 with brake) - Add X to the end of the reference	.../X

## Tray and rack holder trolleys

- 4 swivel Ø 100 mm castors, without brake, zinc coated
- Supplied without racks and trays
- Max. rolling load: 200 kg



Ergonomics: Higher handle = less effort required

## All AISI 304L stainless steel models



### WITHOUT HANDLE - Height 166 mm

Designation	L x l mm	Kg	Ref.
For racks 500 x 500 mm	515 x 515	7	<b>CC55</b>
For racks 600 x 400 mm	616 x 416	7	<b>CC64</b>

Shipping within 48h




### WITH HANDLE - Height 950 mm

Designation	L x l mm	Kg	Ref.
For racks 500 x 500 mm	515 x 515	9	<b>CC55M</b>
For racks 600 x 400 mm	616 x 416	9	<b>CC64M</b>

Shipping within 48h

OPTION	Ref.
4 stainless steel castors without brake - Add X to the end of the reference	.../X

## ABS models

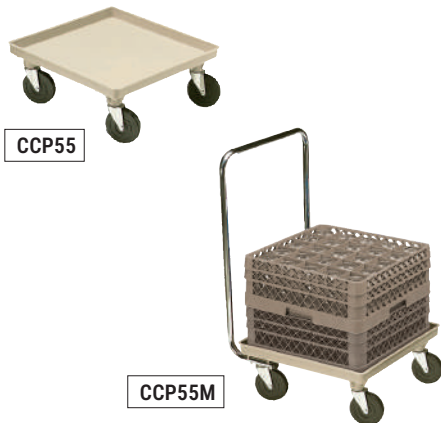

### WITHOUT HANDLE - Height 230 mm

Designation	L x l mm	Kg	Ref.
For racks 500 x 500 mm	540 x 540	5	<b>CCP55</b>

### WITH HANDLE - Height 980 mm

Designation	L x l mm	Kg	Ref.
For racks 500 x 500 mm	540 x 540	6	<b>CCP55M</b>

## Mobile container

- AISI 304L stainless steel
- On swivel castors: Ø 100 mm (with 2 brakes), zinc coated
- Dimensions of the container : L 800 x W 596 x H 450 mm
- Drainage by 1/4 turn tap
- Square tubular feet  $\square$  40 x 40 mm

Designation	L x W x H mm	Kg	Ref.
Container 190 liters	815 x 610 x 755	28	<b>PM210RX</b>

Shipping within 48h



## Drainage and warehousing trolley for dishwasher racks (500x500)



### Sloping storage

- AISI 304L 25 x 25 mm welded stainless steel tubes body
- Inclined warehousing for drainage. Stop stainless steel rear bar
- 4 polyamide castors Ø 125 mm. 2 breaks. Minimum and maximum temperature : -20°C to +60°C. 4 x protecting rings for the castors



This trolley allows the racks to be returned from the end of the dishwashing line to the start in a single trip, effortlessly. It makes draining easier and frees up space in smaller dishwashing areas.



8 x racks (H 100 mm) on 3 levels - 24 racks per trolley

Designation	L x W x H mm	Kg	Ref.
Sloping storage trolley	930 x 425 x 1700	16	<b>CECV24</b>

CECH61



### Flat storage

- Trolley for dishwasher racks
- 6 levels
- All in stainless steel AISI 304L
- Max. load : 250 kg for the model with stainless steel castors



More robust and economic model

Designation	L x W x H mm	Kg	Ref.
Trolley with polyamid castors	635 x 605 x 1700	25	<b>CECH61</b>
Trolley with stainless steel castors	635 x 605 x 1700	25	<b>CECH61X</b>

## Draining and storage trolleys for GN containers

- Body in stainless steel square tubes 25 x 25 mm
- Stainless steel wiring shelves
- Polyamide castors Ø 125 mm, 2 with brakes, temperature resistance: -20 C to +60 C
- Delivered dismantled flat packed (screws supplied)



### 3 levels

Designation	L x W x H mm	Kg	Ref.
2 GN1/1 levels and 1 GN2/1 level	1250 x 575 x 1870	30	<b>CEG3</b>

### 4 levels

Designation	L x W x H mm	Kg	Ref.
4 GN1/1 levels	1250 x 575 x 1870	34	<b>CEG4</b>

(the 4 levels can be converted into 3 levels by not installing the top level)

### OPTION

OPTION	Ref.
Removable antidrop bar (forecast 1 bar per level)	<b>CEGB</b>



Storage possibilities

Levels	Lids, racks, trays depth 20 mm			Trays depth 40, 55, 65 mm			Trays depth 100 mm			Trays depth 150 mm			Trays depth 200 mm		
	GN 1/2	GN 1/1	GN 2/1	GN 1/2	GN 1/1	GN 2/1	GN 1/2	GN 1/1	GN 2/1	GN 1/2	GN 1/1	GN 2/1	GN 1/2	GN 1/1	GN 2/1
3	128	64	32	64	32	16	40	20	10	24	12	6	20	10	5
4	256	128	-	128	64	-	80	40	-	48	24	-	40	20	-

## Proofer trolley

- Proofer trolley with a stainless steel tube body.
- 12 mixed levels GN1/1 and 600 x 400 mm.
- Heating by convection, 3,2 KW power. Maximum temperature 220°C.
- Cover stainless steel / Alunox, to reduce the weight. The Alunox avoids the fingers stains and reduces the cleaning of the Sofinor Proofer trolley.
- Box completely welded and rounded at the bottom (hygenic inside the heating area), the runners are easily removable for an easy cleaning.
- Designed with rounded edges on the door and on the top
- 2 integrated handles on both sides for an easy handling.
- Electronic regulation for a management of the temperatures to the last Celsius degree (energy saving).



Designation	L x D x H mm	Kg	Power	Ref.
Proofer trolley	615 x 970 x 1170	95	230V	CE12

**4+**

LIGHT

EASY HANDLING

STRONG

PRACTICAL



IDEAL FOR COOKING AT LOW TEMPERATURE  
AND HOT CONNEXIONS

IDEAL FOR CATERING AND SHOWS

## Constant level trolleys



CNCA



Good insulation  
Easy grip handle for manoeuvring

### For hot round plates

- Internal and external construction in stainless steel
- Non-ventilated static heating
- 2 cylinders delivered with 2 stainless domed covers
- For plates from Ø 200 to 260 mm
- 65 plates per cylinder
- Max. total load: 140 kg
- Thermostatic control from 0°C to 100°C (with backup thermostat)
- Dummy socket to hold spiral mains cable
- 4 composite castors Ø 125 mm, 2 with brakes
- Protective buffers
- 230 V single phase - 50/60 Hz - 1400 W

L x W x H mm	Kg	Ref.
998 x 442 x H 1049 with domed cover (H 899 without cover)	39	<b>CNCA</b>

### For racks 500 x 500



CNCC

- Stainless steel
- Runs on rollers fitted on waterproof ball bearings
- Maximum weight: 120 kg
- For 7 racks 500 x 500 x H 100 mm
- 4 composite castors Ø 125 mm, 2 with brakes
- Protective buffers
- The rack pick-up height is adjusted by removing springs

L x W x H mm	Kg	Ref.
805 x 545 x 974	23	<b>CNCC</b>

### For trays



CNCP

- Stainless steel construction
- Runs on rollers fitted on waterproof ball bearings
- 4 composite swivel castors Ø 125 mm, 2 with brakes
- Protective buffers
- Capacity:
  - 100 to 120 standard trays 460 x 360 mm, 480 x 370 mm, GN 1/1 530 x 325 mm
  - 200 to 240 fast-food trays 350 x 270 mm (delivered without trays)
  - Max. load: 120 kg (from 65 kg, the support tray is stopped against the interior structure)
  - Automatic stacking adjustment by removing the springs according to weight of trays used.

L x W x H mm	Kg	Ref.
805 x 545 x 974	28	<b>CNCP</b>

### For trays - Special conveyor



CNPCP

- Same as above (trolleys for trays) the trays at the end of the conveyor
- Equipped with 2 side walls in 1.5 mm stainless steel to guide
- Max. load: 120 kg

L x W x H mm	Kg	Ref.
805 x 545 x 974	28	<b>CNPCP</b>

## Plate trolley - Low model

- Ø 25 mm curved AISI 304L stainless steel frame
- 2 removable stainless steel wire separators used as grid to stop items dropping off the trolley
- 4 Ø 125 mm swivel wheels, polyamide coated, 2 with brakes, with rubber bumpers
- Optional: 30/100ths PVC dust cover



CPA200

### Trolley for 200 plates - Low model

- Max. load : 150 kg

Designation	L x D x H mm	Kg	Ref.
Low model for 200 plates	910 x 366 x 761	20	<b>CPA200</b>

 Shipping within 48h



CPA400

### Trolley for 400 plates - Low model

- Max. load : 200 kg

Designation	L x D x H mm	Kg	Ref.
Low model for 400 plates	910 x 613 x 742	25	<b>CPA400</b>





MDCPA200 + CPA400

### Storage unit for low model trolleys

- AISI 304L stainless steel.
- 2 swing doors with internal handle, no lock.
- Top with backrest, 20 mm rounded edge, 60 mm thick work top, in AISI 304L stainless steel 1.5 mm thickness.
- Backrest 100 x 20 mm, slope edge.
- With ABS feet Ø 38 mm.
- Without low floor for the passage of the trolleys. Plate trolleys non supplied (reference CPA200 or CPA400).

Designation	L x D x H mm	Kg	Ref.
Storage unit for CPA200/400	1200 x 700 x 900	25	<b>MDCPA712</b>

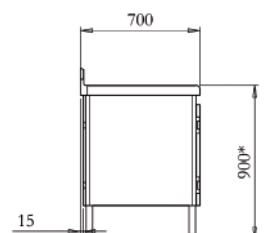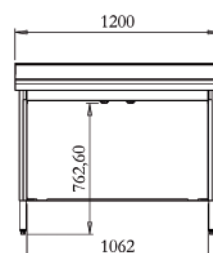

## Plate trolley - High model

- Ø 25 mm curved AISI 304L stainless steel frame
- 2 removable stainless steel wire separators used as grid to stop items dropping off the trolley
- 4 Ø 125 mm swivel castors, polyamide coated, 2 with brakes, with rubber bumpers
- Optional: 30/100ths PVC dust cover



CPA200H

### Trolley for 200 plates - High model

- Max. load : 150 kg

Designation	L x D x H mm	Kg	Ref.
High model for 200 plates	910 x 366 x 990	22	<b>CPA200H</b>

Shipping within 48h



CPA400H

### Trolley for 400 plates - High model

- Max. load : 200 kg

Designation	L x D x H mm	Kg	Ref.
High model for 400 plates	910 x 638 x 990	27	<b>CPA400H</b>



CPASBAC

## PVC protective covers for high and low trolleys

Designation	Kg	Ref.
AISI 304L stainless steel cutlery collector* to be fitted to plate trolleys CPA200(H) or CPA400(H)	2.5	<b>CPASBAC</b>

\* For GN1/3 gastronorm containers (not supplied)



CPA200 + CPAHOU200

## PVC protective covers for high and low trolleys

Designation	L x D x H mm	Ref.
Cover for CPA200	940 x 395 x 550	<b>CPAHOU200</b>
Cover for CPA200H or for (CPA200 + CPASBAC)	940 x 500 x 890	<b>CPAHOU200H</b>
Cover for CPA400	940 x 650 x 550	<b>CPAHOU400</b>
Cover for CPA400H or for (CPA400 + CPASBAC)	940 x 770 x 890	<b>CPAHOU400H</b>

Shipping within 48h